


SNAP-LOK™ Restrained Push-Joint Reducers

C-153

20" - 24" = Class 350 with TYTON® Gasket
 30" - 42" = Class 250 with FASTITE® Gasket

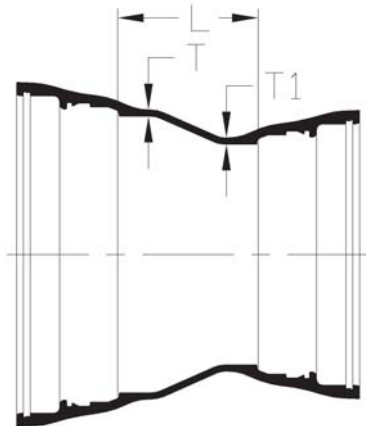

Fitting Size (in.)	Dimensions (in.)			Weights (lbs.)
	T	T ₁	L	
30" x 20"	0.72	0.72	24.00	1013
30" x 24"	0.72	0.72	15.50	955
36" x 24"	0.77	0.72	28.00	1354
36" x 30"	0.77	0.72	15.50	1333
42" x 24"	0.88	0.72	40.00	1840
42" x 30"	0.88	0.72	24.00	1720
42" x 36"	0.88	0.77	15.50	1656
48" x 30"	0.94	0.72	40.00	2336
48" x 36"	0.94	0.77	28.00	2175
48" x 42"	0.94	0.88	16.00	1993

NOTE: All fittings on this page - call for availability